

2 POLES 1000 RPM

Power KW	power HP	Type	Frame	Current In (A)	Current Is/ In
0.09	0.12	56-2	56	0.3	4.5
0.12	0.18	568-2	56	0.3	4.5
0.18	0.25	63-2	63	0.5	4.5
0.25	0.35	63-2	63	0.6	4.5
0.37	0.5	71-2	71	0.9	5.5
0.55	0.75	71-2	71	1.3	5.5
0.75	1	80-2	80	1.7	5.5
1.1	1.5	80-2	80	2.4	5.5
1.5	2	90S-2	90S	3.2	5.5
2.2	3	901-2	90L	4.3	5.5
3.7	5	100L-2	100L	7.1	6
5.5	7.5	132-2	132s	10.2	6
7.5	10	132S-2	132s	13.3	6.5

4 POLES 1500 RPM

Power KW	power HP	Type	Frame	Current In (A)	Current Is/ In
0.06	0.09	56-4	56	0.2	4
0.09	0.12	56-4	56	0.3	4
0.12	0.18	63-4	63	0.4	4
0.18	0.25	63-4	63	0.5	4
0.25	0.35	71-4	71	0.7	4
0.37	0.5	71-4	71	0.9	4.5
0.55	0.75	804-4	80	1.4	4.5
0.75	1	80-4	80	1.8	4.5
1.1	1.5	90S-4	90S	2.5	5
1.5	2	90L-4	90L	3.4	5
2.2	3	100L-4	100L	4.5	5
3.7	5	112M-4	112M	7.6	5
5.5	7.5	132S-4	132S	11.2	5.5
7.5	10	132M-4	132M	14.7	5.5


6 POLES 1000 RPM

Power KW	power HP	Type	Frame	Current In (A)	Current Is/ In
0.18	0.25	71-6	71	0.6	4
0.25	0.35	71-6	71	0.9	4
0.37	0.5	80-6	80	1	4
0.55	0.75	80-6	80	1.5	4
0.75	1	90S-6	90s	1.9	4
1.1	1.5	90L-6	90L	2.8	4
1.5	2	100L	100L	3.7	4.5
2.2	3	112M-6	112M	5.1	5.5
3.7	5	132S-6	132S	8.3	5
5.5	7.5	132M-6	132M	12	5.5
7.5	10	160M-6	160M	15.9	5.5

8 POLES 750 RPM

Power KW	power HP	Type	Frame	Current In (A)	Current Is/ In
1.5	2	112M-8	112M	4	5
2.2	3	132S-8	132S	5.5	6
3.7	5	160M-8	160M	8.7	6
5.5	7.5	160M-8	160M	12.5	6
7.5	10	160L-8	160L	16.3	6

**2 HP 3 Phase
FOOT-MOUNT**

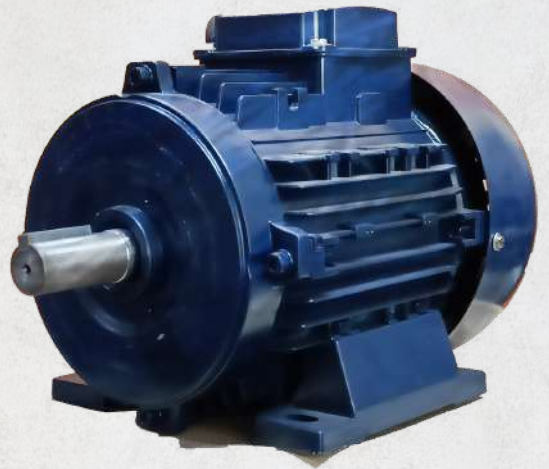

**3 HP 3 PHASE
FOOT-MOUNT**



**2 HP 3 Phase
Flange-MOUNT**



**5 HP 3 PHASE
FOOT-MOUNT**

